


Magnum®



Magnum®





Logix™




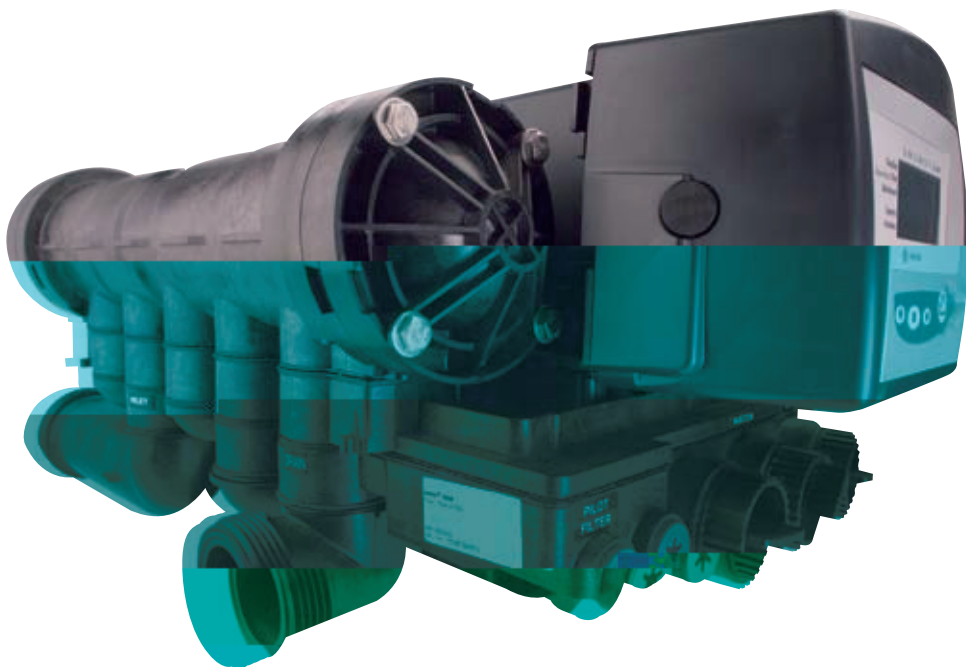



Flow Rates (Valve Only)

@15 psi (1.03 bar)	76 gpm (17.3 m ³ /hr)
@ 25 psi (1.72 bar)	89 gpm (20.2 m ³ /hr)
	Cv = 19.5 (Kv = 17)
	Cv = 17.8 (Kv = 19.9)
/	
/	4 8UN
	2 NPT BSPT CPVC
	3/4 NPT
*	1-1/2 NPT BSPT CPVC
	1-1/2
	5/8 ±1/8-
*	5 - 40 gpm
/	
O	EPDM
	7 14 16 18 21 24 30 36
	25 psi – 100 psi (1.72 bar – 6.9 bar)
	35° – 100°F (2° – 38°C) 120°F (49°C)

- Magnum

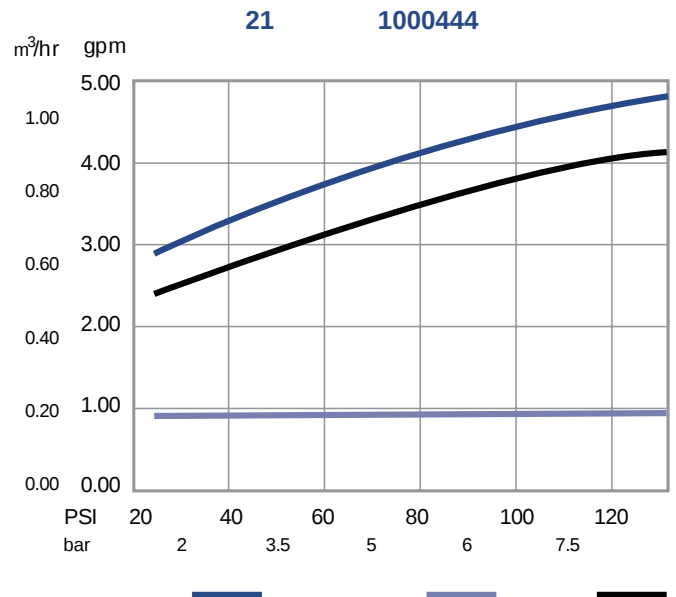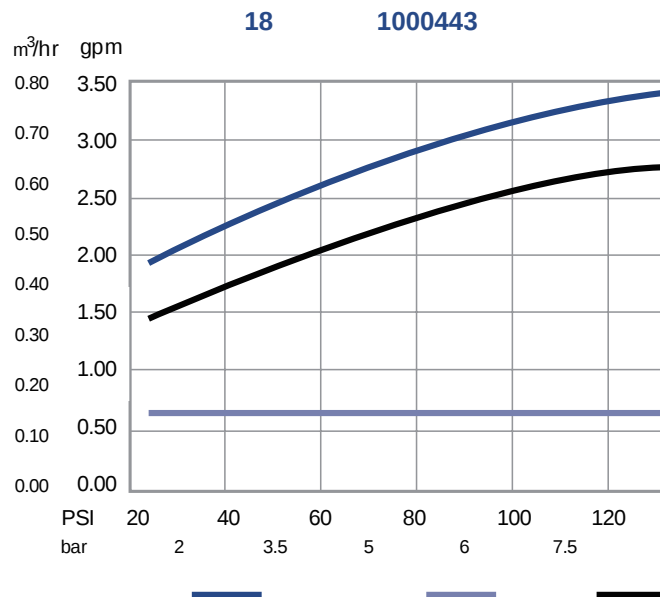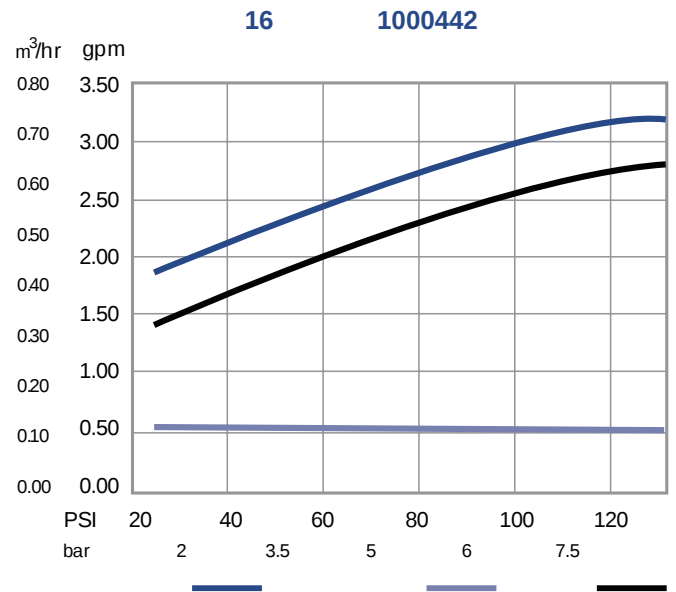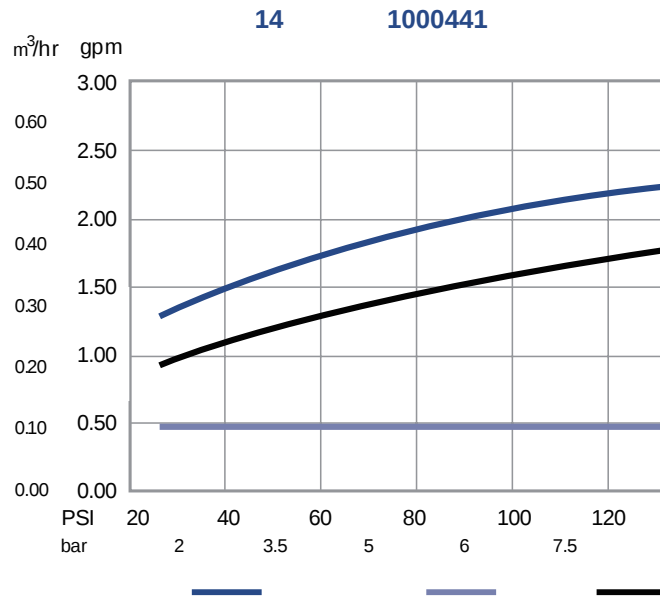


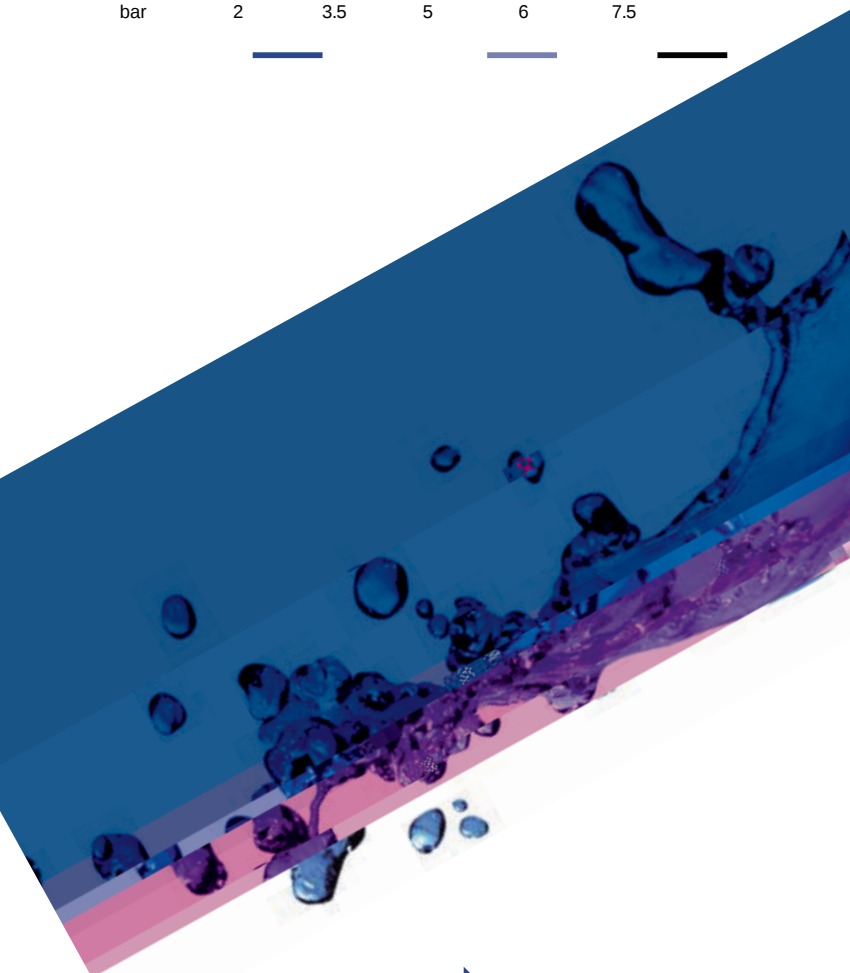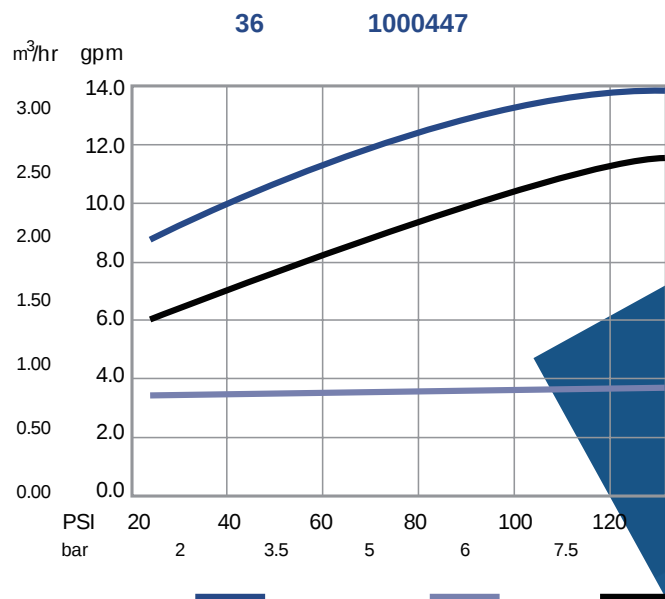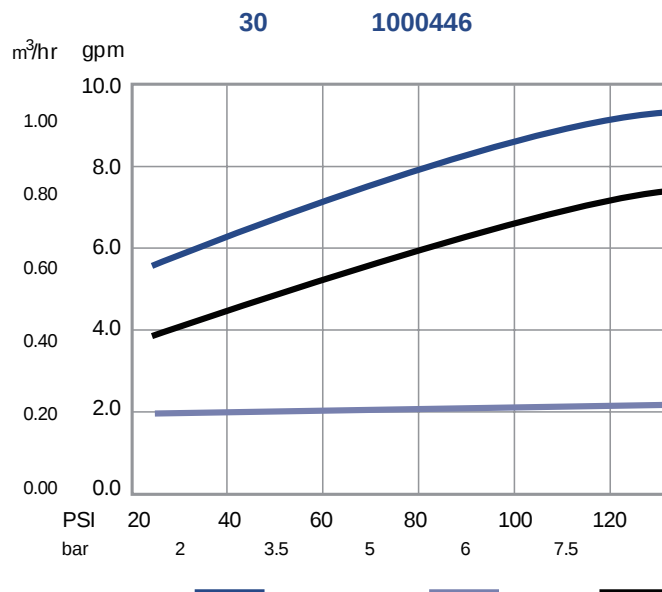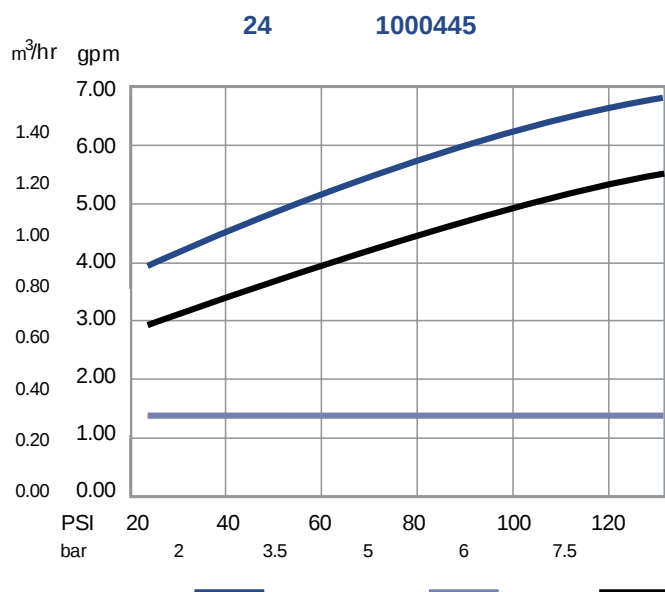


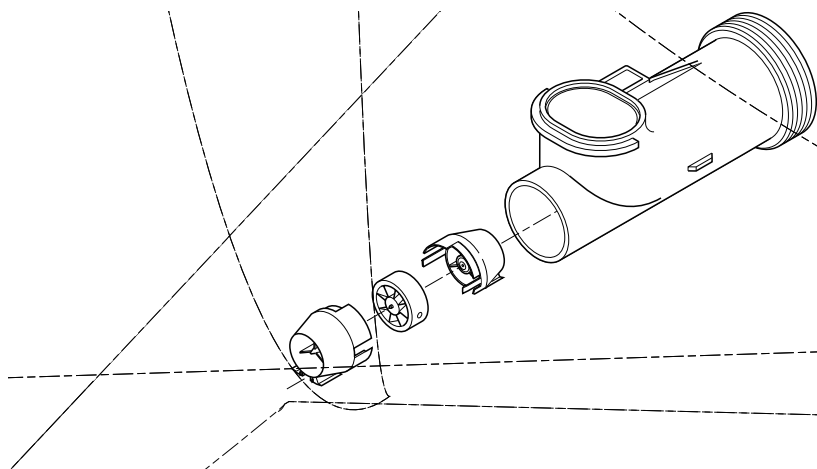


1-1/2 Magnum CV

2 Magnum IT

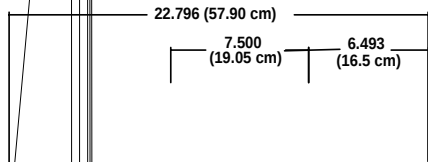

11.471
(29.13 cm)



8.680
(22.04 cm)

